



An EFCO Company

SWAPLOADER[®]

"Hooked on Quality"

U.S.A. LTD.

SL-520X



SWAPLOADER'S LATEST 50,000 LB HOOK LIFT HOIST



FEATURES INCLUDE

-  50,000 lb dump/lift capacity
-  Fixed 61-3/4" hook height or adjustable jib option from 53-7/8" to 61-3/4" hook heights
-  Newly optimized for the waste industry
-  Increased payload – over 800 lb weight reduction
-  Easily serviceable wear pads
-  Reduced payload height
-  Optional Dual Rear Roller with new lightweight design
-  Optional Universal or Outside Hydraulic Body Lock

1800 NE Broadway Avenue, Des Moines, IA 50313 | web: swaploader.com | email: sales@swaploader.net | toll free: 888.767.8000 | phone: 515.266.3042

MADE IN USA ★

www.swaploader.com





An EFCO Company

SWAPLOADER®

"Hooked on Quality"

U.S.A. LTD.

SL-520X SPECIFICATIONS


MODEL		SL-520X	
MODEL DESCRIPTION	DUMP CAPACITY (INCLUDING CONTAINER)		50,000 lb
	DUMP ANGLE		60°
	LIFT CAPACITY (INCLUDING CONTAINER)		50,000 lb
	HOIST WEIGHT**	FIXED ADJ.	6,185 lb 6,325 lb
GENERAL DIMENSIONS (SEE DIAGRAM)	HOOK TO REAR ROLLER (DIM. A)		222.75"
	HOOK HEIGHT (DIM. B)	FIXED ADJ.	61.75" 61.75" / 53.88"
	HOIST HEIGHT (DIM. C)		11.5"
	HOIST CG (DIM. D)		115.0"
	OPTIMUM BODY LENGTHS (DIM. E)		20' - 22'
	POTENTIAL BODY LENGTHS* (DIM. E)		17' - 24'
	BODY LONGSILL WIDTH*		40.50" / 41.63"
	HYDRAULIC SYSTEMS	HYDRAULIC PUMP TYPE (CID)	
FLOW @ PUMP RPM*		21 GPM @ 1,300 RPM	
RELIEF PRESSURE		4,650 PSI	
HYDRAULIC RESERVOIR		25 gal	
LIFT CYLINDER	QUANTITY		2
	BORE		Ø 6"
	STROKE		85.25"
JIB CYLINDER	QUANTITY		1
	BORE		Ø 4"
	STROKE		52"
TRUCK SPECS (RECOMMENDED)	GVW RANGE*		50,000 lb or greater
	CAB-AXLE DIM.* (SINGLE AXLE)		N/A
	CAB-TRUNNION DIM. (TANDEM AXLE)		176" - 190"
	CLEAR FRAME RAIL*		246"
	FRAME HEIGHT		up to 45"
PTO SPECS (RECOMMENDED)	PUMP MOUNT*		Direct Mount SAE B-B, 4 Bolt Spline Shaft 1" 15T 16/32
	TORQUE REQUIRED		250 ft-lbf
*See All-Model Specifications literature for further information			
**Weight includes base hoist with installation kit and cylinder oil			

*See All-Model Specifications literature for further information


**Weight includes base hoist with installation kit and cylinder oil




NEW UPGRADES

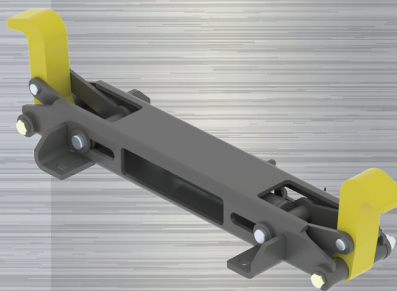


OPTIONAL HYDRAULIC
UNIVERSAL BODY LOCK

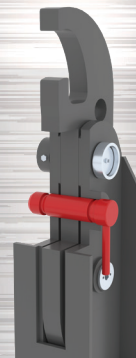

SECURE NEW
LOCK PIN DESIGN

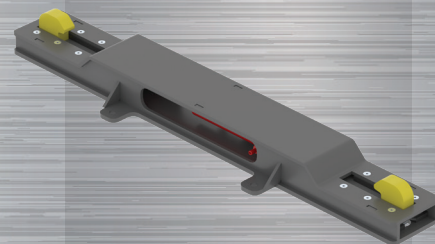

OPTIONAL HYDRAULIC
OUTSIDE BODY LOCK

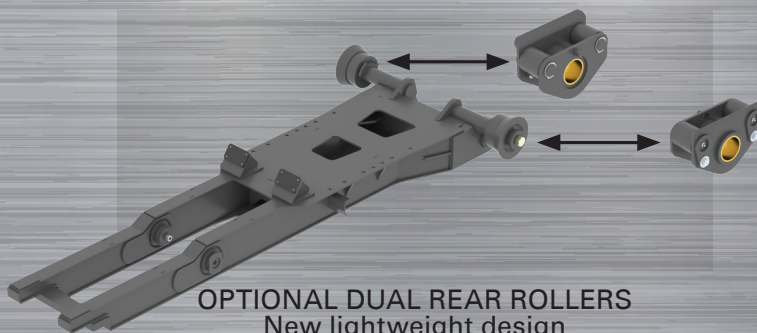

OPTIONAL DUAL REAR ROLLERS
New lightweight design